


SynRelay

Relay Board



Features

- ✓ 8 latching relays
- ✓ Solid and durable (high reliability components, conformal coated)
- ✓ Can be used in solar/battery powered applications
- ✓ Screw-less terminal blocks for reliable and quick cable interconnection

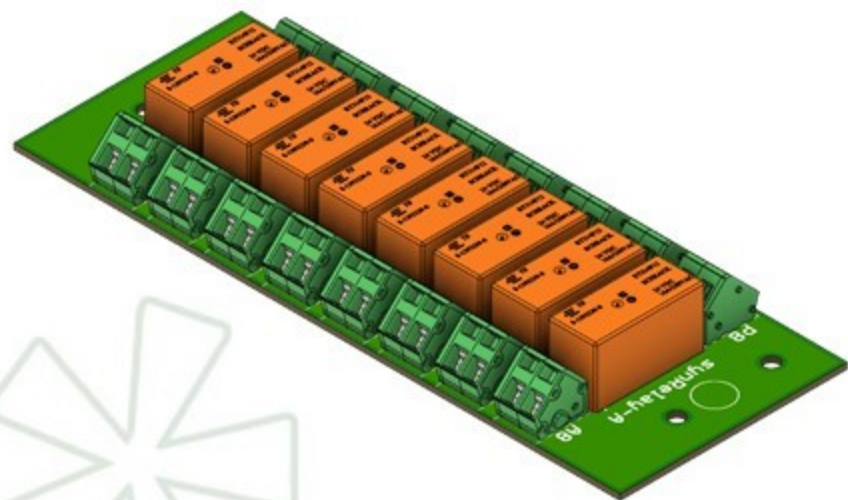

Specifications

Actuator ports	8 actuator ports: rated current: 16A max current, up to 4sec: 30A rated voltage: 250VAC max breaking capacity: 4000VA screw-less terminal blocks
Operating Temperature	-20°C to +85°C
System Conformal Coating	Acrylic conformal coating
Enclosure size	13.5 cm × 19.5 cm × 7.0 cm
Weight	0.5 Kg (sensor dependent)

